SPRINGER°



TAYLOR 1200

Powerful and durable

TAYLOR 1200

Powerful and durable




SPRINGER's TAYLOR 1200 butt-end reducer increases productivity in the sawmill right at the start of the production process. The system can be integrated as a bypass solution or directly at the log infeed.

The TAYLOR 1200 extends the log infeed without delaying the production flow. Within a very short time, it can be integrated into

Logs in cross transport without reduction:

existing log infeeds without an additional base frame.

Thanks to angled cutting shafts, an optimal contour-oriented reduction is possible. Chainless conveyor units and Hardox toothed wheels characterize the maintenance-friendly and durable butt-end reducer

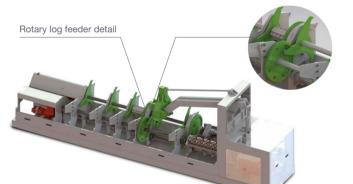

TAYLOR 1200 with rotary log feeder

Reduction capacity at ø 400mm: 8 sec

Log length (standard): 3,0 - 7,3 m

Log diameter: 150 - 900mm

Length of reduction: ca. 1000 mm

Milling shaft length: 1236 mm

Logs in cross transport without reduction: 45 logs/min

TAYLOR 1200 - LONG with lift-out mechanism Reduction capacity at ø 400mm: Log length (standard): Log diameter: 150 - 900 mm Length of reduction: Milling shaft length: 1236 mm

up to 25 logs/min

TAYLOR 1200 - DUO

double reducer

Reduction capacity at ø 400mm: 8 sec


Log length (standard): 3,0 – 7,3 m

Log diameter: 150 - 900mm

Length of reduction: ca.1000 mm


Milling shaft length: 1236 mm

Logs in cross transport without reduction:

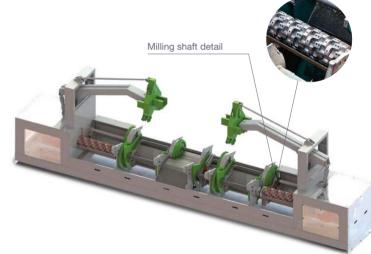

TAYLOR 1200 - SPECIAL Sondermodelle



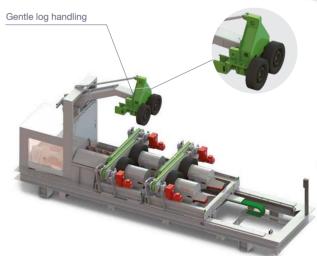

With the third movable overhead milling shaft, particularly long roots can be leveled. Thanks to the movable milling shaft units, special solutions with a reduction on both sides in the log infeed deck can also be implemented.

25 logs/min

CONTACT US!

wwww.springer.eu

SPRINGER°

Springer Maschinenfabrik GmbH Hans-Springer-Strasse 2 9360 Friesach AUSTRIA

Tel.: +43 4268 2581 - 0 E-Mail: office@springer.eu www.springer.eu

